


# BenQ Digital Projector


## MP522 ST

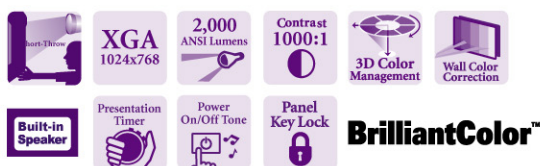

### Highlights

- Short Throw Lens (Ratio 0.9)
- XGA Native Resolution
- 2000 ANSI Lumens
- 4000 Hours Lamp Life @ Eco
- Brilliant Color™
- 3D Color Management
- Wall Color Correction
- Closed Caption
- Standby D-Sub Output
- Baud Rate Change
- 5W Speaker x 1
- Presentation Timer
- Quick Auto Search
- Quick Cooling
- Security Password
- Resolution Reminder
- Panel Key Lock
- "Q?" Hot Key for FAQ
- Power saving "Auto Off"
- Power On/Off Tone
- 11 Sets of Picture Mode

### BenQ | Multi-function Connectors

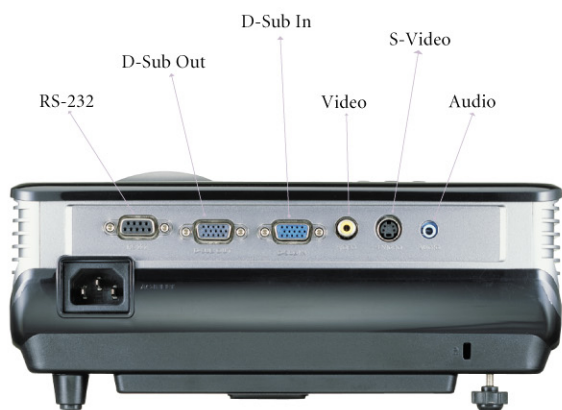

### Specifications

Projection System	DLP™ technology by Texas Instruments®	
Native Resolution	XGA (1024 x 768)	
Brightness	2000 ANSI lumens	
Contrast Ratio	1000:1 (Full on/Full off)	
Aspect Ratio	4:3 Native, 16:9 Selectable	
Color	Full 16.7 million color palette	
Lens	F= 2.5 f=10mm	
Zoom Ratio	Fixed	
Image Size (Diagonal)	27.5" to 300"	
Throw Ratio	0.9:1	
Lamp	185W, 3000/4000 hours(Normal/Eco)	
Computer Compatibility	VGA(640 x 480) to SXGA(1280 x 1024)	
HDTV Compatibility	480i, 480p, 576p, 720p, 1080i	
Video Compatibility	NTSC, PAL, SECAM	
Horizontal Frequency	31-82 kHz	
Vertical Scan Rate	48-85 Hz	
Input Terminals	PC	Analog RGB: D-sub 15 pin x 1
	A/V	Component Video: D-sub 15 pin (Shared with Analog RGB connector) S-Video: Mini Din 4 pin x 1 Composite Video: RCA x 1 Audio: Stereo Mini Jack x 1
Output Terminal	PC: D-Sub 15 pin x 1 Speaker 5W x 1	
Control Terminal	Serial Connector : RS232 D-sub 9 pin x 1	
Dimensions(W x H x D)	10 x 3.5 x 8.4 inch (255 x 90 x 214 mm)	
Weight	4.9 lbs (2.4kg)	
Power Supply	100 to 240 VAC, 50 to 60 Hz	
Power Consumption	Max 280W, Standby Max 5W	
Noise Level	31/26 dB (Normal/Economic mode)	
On-Screen Display Languages	English/ French/ German/ Italian/ Spanish/ Russian/ Traditional Chinese/ Simplified Chinese/Japanese/ Korean/ Swedish/ Dutch/ Turkish/ Czech/ Portuguese / Thai/ Polish	
Picture Modes	PC Input:	
	Dynamic Mode	Presentation Mode
	sRGB Mode	Cinema Mode
A/V Input:	Dynamic Mode	
	Cinema Mode	Standard Mode
	User 1 Mode	User 2 Mode
Functions	BrilliantColor™	
	3D Color Management	
	Wall Color Correction	
	Quick Auto Search	
	Time Controller	
	Presentation Timer	
	Closed Caption	
	Standby D-Sub Output	
	Baud Rate Change	
	Resolution Reminder	
	Panel Key Lock	
"Q?" Hot Key for FAQ		
Power On/Off Ring Tone		
11 sets of Picture Mode		
Auto Phase Adjustment		
Blank @ ECO mode		
Quick Cooling		
Auto Off		
Security Password		
High Altitude Mode		
Accessories (Standard)	Quick Start Guide	
	Manual CD	
	Remote Control w/battery	
Accessories (Optional)	VGA Cable	
	PWR Cord	
	Spare Lamp Kit	
Soft Carry Case		
Ceiling Mounting Kit		
Presentation Plus		

\*BenQ has the right to change spec without any notice.