

# Canon

MULTIMEDIA  
PROJECTORS  
AND VISUALIZER



LV-7585



LV-7365



LV-7265



LV-7260



LV-X7



RE-455X

**Canon**  
*image*ANYWARE**

1-800-OK-CANON  
[www.usa.canon.com](http://www.usa.canon.com)

Canon U.S.A., Inc.  
One Canon Plaza  
Lake Success, NY 11042 U.S.A.

Canon Canada Inc.  
6390 Dixie Road  
Mississauga, Ontario L5T 1P7 Canada

Canon Latin America  
703 Waterford Way, Suite 400  
Miami, FL 33126 U.S.A.

Canon Mexicana, S. de R.L. de C.V.  
Blvd. Manuel Ávila Camacho  
No. 138, Piso 17  
Col. Lomas de Chapultepec  
C.P. 11000 México, D.F. México

©2007 CANON U.S.A., INC.  
PRINTED IN U.S.A.

0116W057 10/07


[www.canonprojectors.com](http://www.canonprojectors.com)

# LV-7585

NEW

## Brilliant presentations begin with Genuine Canon lenses

At the heart of every Canon LV multimedia projector is a precision lens designed and crafted with over 70 years of optical expertise. Canon's projector lenses consistently produce images with superior color and clarity. A special multi-layer coating on each lens surface minimizes internal reflection, flare, and ghosting while increasing contrast to faithfully reproduce every color down to the most intricate details. Native XGA resolution (1024 x 768) ensures razor-sharp and color-rich presentations every time.

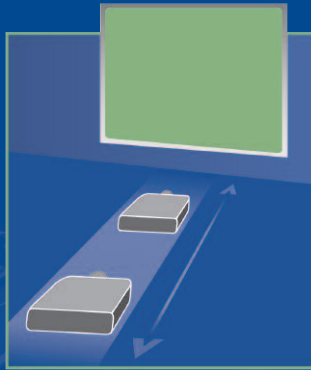

Our 1.6x Optical Zoom lens\* delivers remarkable range, while our short throw ratios are great for close up applications.

A perfect blend of illumination, optical excellence, and compact, easy-to-use design, Canon LV multimedia projectors consistently deliver powerful performances that are perfect for any size venue—from the classroom to the coliseum.

\*Does not apply to LV-7585



**XGA**  
1024 x 768

**6500**  
ANSI Lumens

**28.7lbs.**  
(13.0kg)



6500 lumens, optional lenses and the Auto-winding filter system provides installation-friendly design.

### FEATURES

- Native XGA Resolution (1024 x 768)
- 6500 ANSI Lumens (90% Uniformity)
- 1600:1 Contrast Ratio
- 1.3x Optical Powered Zoom (standard lens)
- Auto-winding Filter System
- Powered Lens Shift V 1:1-10:0, H 2:3-3:2
- 4 optional projector lenses available†
- Digital Keystone Correction (±40 degrees Vertical, ±20degrees Horizontal)
- Throw Distance: 4.6 to 48.2 ft. (1.4 to 14.7m)
- Projected Image Size: 31 to 400 in.
- Quiet Operation: 32dB (Quiet Mode)
- Input Terminals: S-Video, Component, Composite, 5BNC, DVI-D (Supports HDCP) and VGA
- Output Terminals: VGA
- Optional Network Imager LV-N102 SNMP Compatible
- Size: (W x D x H) 14.6 x 17.3 x 7.4 in. (370 x 440 x 187mm)
- 3 Year Parts and Labor Warranty – 120 Day Lamp Life Warranty



### Kit Contents

- Projector • Wireless/Wired Remote Control (AAA Batteries Included)
- Power Cable • VGA Computer Cable • Mouse Control Cable (USB)
- Lens Cap • CD-Rom • Quick Start Guide • Warranty Card

\*See page 6 for lens options. See page 7 for details on the "Triple P" Program.

LV-7585

LV-7365

LV-7265

LV-7260

LV-X7

Accessories

RE-455X

1

**NEW**

# LV-7365

**XGA**  
1024 x 768**3000**  
ANSI Lumens**7.3lbs.**  
(3.3kg)

Boasting 3000 Lumens, our brightest lightweight features advanced connectivity for HD compatibility

## FEATURES

- Native XGA Resolution (1024 x 768)
- 3000 ANSI Lumens (85% Uniformity)
- 500:1 Contrast Ratio
- 1.6x Optical Zoom
- Automatic/Manual Keystone Correction (±30 degrees vertical)
- Throw Distance: 3.6 to 27.6 ft. (1.1 to 8.4m)
- Projected Image Size: 25 to 300 in.
- Quiet Operation: 29dB (Quiet Mode)
- DVI-I Interface with HDCP
- Enhanced Wall Color Correction and Color Management System
- 5w Built-in Speakers
- Long Life Lamp 3000h (Quiet-Mode)
- Size: (W x D x H) 12.2 x 10.4 x 4.3 in. (310 x 265 x 109mm)
- 3-Year Parts and Labor Warranty – 120-Day Lamp Life Warranty



## Kit Contents

- Projector • Wireless Remote Control (AAA batteries included)
- Remote Mouse Receiver • DVI to VGA Adapter • Power Cable
- VGA Computer Cable • Lens Cap • Soft Carrying Case
- CD-ROM • Quick Start Guide • Warranty Card

# LV-7265

**XGA**  
1024 x 768**2500**  
ANSI Lumens**6.8lbs.**  
(3.1kg)

This lightweight includes a DVI interface for advanced connectivity and HD compatibility

## FEATURES

- Native XGA Resolution (1024 x 768)
- 2500 ANSI Lumens (85% Uniformity)
- 600:1 Contrast Ratio
- 1.6x Optical Zoom
- Automatic/Manual Keystone Correction (±30 degrees vertical)
- Throw Distance: 3.6 to 27.6 ft. (1.1 to 8.4m)
- Projected Image Size: 25 to 300 in.
- Quiet Operation: 29dB (Quiet Mode)
- DVI-I Interface with HDCP
- Enhanced Wall Color Correction and Color Management System
- 5w Built-in Speakers
- Long Life Lamp 3000h (Quiet-Mode)
- Size: (W x D x H) 12.2 x 10.4 x 4.3 in. (310 x 265 x 109mm)
- 3-Year Parts and Labor Warranty – 120-Day Lamp Life Warranty



## Kit Contents

- Projector • Wireless Remote Control (AAA batteries included)
- Remote Mouse Receiver • DVI to VGA Adapter • Power Cable
- VGA Computer Cable • Lens Cap • Soft Carrying Case
- CD-ROM • Quick Start Guide • Warranty Card

See page 7 for details on the "Triple P" Program.

LV-7585

LV-7365

LV-7265

LV-7260

LV-X7

Accessories

RE-455x

LV-7585

LV-7365

LV-7265

LV-7260

LV-X7

Accessories

RE-455x

# LV-7260



**XGA**  
1024 x 768

**2000**  
ANSI Lumens

**6.6lbs.**  
(3.0kg)

**TRIPLE P**  
**PPP**

**Robust, color-rich images with increased contrast provide flexibility and performance power.**

## FEATURES

- Native XGA Resolution (1024 x 768)
- 2000 ANSI Lumens (85% Uniformity)
- 600:1 Contrast Ratio
- 1.6x Optical Zoom
- Manual Keystone Correction (±30 degrees vertical)
- Throw Distance: 3.7 to 29.1 ft. (1.1 to 8.8m)
- Projected Image Size: 25 to 300 in.
- Quiet Operation: 29dB (Quiet Mode)
- Enhanced Wall Color Correction and Color Management System
- Long Life Lamp 3000h (Quiet-Mode)
- Size: (W x D x H) 12.2 x 10.4 x 4.3 in. (310 x 265 x 109mm)
- 3-Year Parts and Labor Warranty – 120-Day Lamp Life Warranty



## Kit Contents

- Projector • Wireless Remote Control (AAA batteries included) • Remote Mouse Receiver • Power Cable
- VGA Computer Cable • Lens Cap • Soft Carrying Case
- CD-ROM • Quick Start Guide • Warranty Card

# LV-X7



**XGA**  
1024 x 768

**1500**  
ANSI Lumens

**6.4lbs.**  
(2.9kg)

**TRIPLE P**  
**PPP**

**Lightweight design and XGA resolution for portable presentations with outstanding image quality**

## FEATURES

- Native XGA Resolution (1024 x 768)
- 1500 ANSI Lumens (85% Uniformity)
- 500:1 Contrast Ratio
- 1.6x Optical Zoom
- Manual Keystone Correction (±30 degrees vertical)
- Throw Distance: 3.7 to 29.1 ft. (1.1 to 8.8m)
- Projected Image Size: 25 to 300 in.
- Quiet Operation: 25dB (Quiet Mode)
- Enhanced Wall Color Correction and Color Management System
- Long Life Lamp 4000h (Quiet-Mode)
- Size: (W x D x H) 12.2 x 10.4 x 4.3 in. (310 x 265 x 109mm)
- 3-Year Parts and Labor Warranty – 120-Day Lamp Life Warranty



## Kit Contents

- Projector • Wireless Remote Control (AAA batteries included) • Power Cable • VGA Computer Cable
- Lens Cap • Soft Carrying Case • CD-ROM • Quick Start Guide • Warranty Card

## OPTIONAL ACCESSORIES FOR LV-7585

### PROJECTOR LENSES

#### Ultra Wide-Angle Lens LV-IL01

- Lens:  $f=22.33\text{mm}$ , F2.5
- Throw Distance: 3.7 to 6.4 ft. (1.13 to 1.96m)
- Projected Image Size: 70 to 120 in.
- Throw Ratio: 0.8:1 (D:W)



#### Wide-Angle Zoom Lens LV-IL02

- Lens:  $f=34.33$  to  $48.02\text{mm}$ , F2.5 to 3.06, 1.4x zoom
- Throw Distance: 3.2 to 25.4 ft. (0.98 to 7.74m)
- Projected Image Size: 40 to 300 in.
- Throw Ratio: 1.25 to 1.8:1 (D:W)

#### Long Focus Zoom Lens LV-IL03

- Lens:  $f=63.5$  to  $111.5\text{mm}$ , F2.03 to 2.89, 1.8x zoom
- Throw Distance: 8.9 to 46.7 ft. (2.73 to 14.23m)
- Projected Image Size: 60 to 300 in.
- Throw Ratio: 2.29 to 4.17:1 (D:W)



#### Ultra Long Focus Zoom Lens LV-IL04

- Lens:  $f=111.6$  to  $155.2\text{mm}$ , F2.06 to 2.73, 1.4x zoom
- Throw Distance: 11.4 to 82.0 ft. (3.48 to 25.0m)
- Projected Image Size: 40 to 300 in.
- Throw Ratio: 4.15 to 5.78:1 (D:W)

### OTHER ACCESSORIES

#### Network Imager LV-NI02


Connects the LV-7585 to your computer network, enabling remote management of the projector through a simple browser-based graphic user interface. This makes a number of tasks easier,

such as programming for operation on a daily or weekly schedule, input mode switching and picture adjustment. Send status alerts via e-mail, furthermore, it offers remote transfer of images, and centralized control of multiple projectors.



- Replacement Lamp LV-LP29
- Ceiling Mount Adapter LV-CL13
- High Ceiling Mount Adapter LV-CL14

## OPTIONAL ACCESSORIES FOR LV-7365/LV-7265/LV-7260/LV-X7

Product	Item Code	Use with
 Replacement Lamp	LV-LP30	LV-7365
	LV-LP26	LV-7265 LV-7260
	LV-LP27	LV-X7
 Ceiling Mount Adapter	LV-CL11	LV-7365 LV-7265 LV-7260 LV-X7
 Component Video Adapter	LV-CA32	LV-7365 LV-7265 LV-7260 LV-X7
 RS-232C Cable	LV-CA34	LV-7365 LV-7265 LV-7260 LV-X7
 DVI Cable	LV-CA29	LV-7365 LV-7265



### TRIPLE P PROGRAM

Canon's Projector Protection Program, also known as "Triple P", is a service program that provides a loaner projector of equal or greater quality in the event that your projector needs to be repaired.

- Free to any buyer within their first year of new product warranty
- Canon Customer Support Center toll free hotline: 1-800-828-4040
- Customer Service Hours: 8 a.m. to Midnight, Monday - Friday and 10 a.m. to 8 p.m., Saturday
- For next business day delivery of loaner projectors, Customer Activation Form must be received by Canon Customer Support Center by 3 p.m. EST (Monday - Friday)
- Customer must provide a valid credit card as security for the loaner unit
- Delivery not available on Saturday and Sunday
- Program available for products purchased and utilized in the U.S.A. only
- Applies to Canon SXGA+ and XGA resolution products only
- Loaner unit based on availability
- Program subject to change at any time without any given notice

# RE-455x



**XGA**  
1024 x 768

**20.7lbs.**  
(9.4kg)

Lightweight Visualizer connects directly to the projector to display paper documents and 3-D objects

## FEATURES

- XGA Resolution (1024 x 768)
- 12x Optical Power Zoom Lens
- Connects easily to your projector, computer monitor, TV, VCR or DVD recorder
- VGA Input/Output
- S-Video and Composite Output
- White Paper Mode – enhances text document display
- Zoom Preset
- Image Freeze
- Auto and Manual Focusing, Exposure and White Balance
- One Shot Auto Focus – ideal when switching objects frequently
- Adjustable Twin Fluorescent Lamps – provides uniform lighting
- Foldable Design for Excellent Portability
- Size: (W x D x H)  
In Use: 28.4 x 20.7 x 21.9 in. (722 x 525 x 556mm)  
Folded: 19.1 x 20.7 x 7.2 in. (486 x 525 x 183mm)
- 1-Year Parts and Labor Warranty

## Kit Contents

- Visualizer • VGA Cable • AC Cable • Dust Cover
- User's Manual • Warranty Card

## COMPARISON CHART

FEATURE	LV-7585	LV-7365	LV-7265	LV-7260	LV-X7
Brightness (ANSI Lumens)	6500 ANSI Lumens	3000 ANSI Lumens	2500 ANSI Lumens	2000 ANSI Lumens	1500 ANSI Lumens
Contrast Ratio	1600:1	500:1	600:1		500:1
Imaging Technology	1.3" LCD x 3	0.63" LCD x 3	0.63" LCD x 3	0.6" LCD x 3	
Native Resolution	1024 x 768 Pixels				
Max. Resolution Supported	1600 x 1200 Max				
Weight	28.7 lbs.	7.3 lbs.	6.8 lbs.	6.6 lbs.	6.4 lbs.
Dimensions (WxDxH)	14.6" x 17.3" x 7.4"		12.2" x 10.4" x 4.3"		
Lens Offset	V: 1.1 - 10.0, Variable H: 2.3 - 3.2, Variable	9:1, Fixed		8.4:1.6, Fixed	
Zoom Lens	1.3x Optical Powered	1.6x Optical Manual			
Focus	Powered (Auto/Manual)	Manual			
Screen Size	31" - 400"	25" - 300"			
Projection Distance	4.6 - 48.2ft (1.4 - 14.7m)	3.6 - 27.6ft (1.1 - 8.4m)		3.7 - 29.1ft (1.1 - 8.8m)	
Throw Ratio(D:W)	1.77-2.30:1	1.37-2.14:1		1:44-2:25:1	
Uniformity	90%	85%			
Digital Keystone Correction	+/-40° vertical (auto) and +/-20° horizontal (manual)	+/-30° vertical (auto)		+/-30° vertical (manual)	
Computer Inputs/Outputs	Digital PC Input (DVF-D), Analog PC Input (D-sub 15pin), Analog PC Output (D-sub 15pin)	Digital PC Input(DVI-I), Analog PC Input (D-sub 15pin), Analog PC Output (D-sub 15pin)	Analog PC Input (D-sub 15pin)		
Scanning Frequency	H:15 ~ 100 kHz, V:48 ~ 100 Hz Dot Clock: 180MHz	H:15 ~ 100kHz, V:50 ~ 120kHz, Dot Clock: 108MHz			
Video Inputs	Component Video (5 BNC), Composite, S-Video	Component Video (with adapter), Composite, S-Video			
Video Support	1080i / 1035i / 720p / 480p, 1080 (PSF/24,25,30)	1080i / 1035i / 720p / 575p / 480p / 575i / 480i			
Audio Input/Output	N/A	Stereo Mini Jack input x1, Stereo RCA Jack input (R/L), Stereo Mini Jack output x1		N/A	
Mouse Control		USB			N/A
Serial Control	D-Sub 9 pin	Mini DIN			
Network	Optional Network Imager LV-NI02	N/A			
Lamp Type	330W NSHA	210W NSH	200W NSH	190W NSH	150W NSH
Lamp Life (Quiet/Normal)	3000/2000 Hours	3000/2000 Hours			4000/3000 Hours
Noise Level	40/32dB	35/29dB	34/29dB	32/25dB	
Power Voltage	100 - 240V, 50/60Hz				
Warranty	3 years parts and labor, 120 day lamp life				

## CANON THROW DISTANCE CHART

### LV-7585 (Standard Lens)

Projection Image Size	31"	40"	100"	200"	300"	400"
Projection Distance	Wide	4.6'	4.6'	11.8'	23.9'	36.0'
	Tele	4.6'	5.9'	15.4'	31.5'	48.2'

### LV-7365 / LV-7265

Projection Image Size	25"	40"	100"	150"	200"	300"
Projection Distance	Wide	—	3.6'	9.2'	13.8'	18.4'
	Tele	3.5'	5.7'	14.3'	21.6'	—

### LV-7260/LV-X7

Projection Image Size	25"	40"	100"	150"	200"	300"
Projection Distance	Wide	—	3.8'	9.6'	14.5'	19.4'
	Tele	3.7'	5.9'	15.1'	22.7'	—

For more detailed throw distance information, please visit us at [www.canonprojectors.com](http://www.canonprojectors.com)