

## New Product Summary

Launch Date – 1<sup>st</sup> July 2008  
Under NDA Until – 1st June 2008

# Epson EB 1720 and 1725

### Lightweight, high brightness, micro-portable projector

The Epson EB-1700 Series has the power to deliver bright, high-contrast images in clear colours. The projectors are also lightweight and compact, ideal for the busy professional on the move, on customer calls or attending many different meetings in the office.

This projector is also very easy to set up and operate, leaving you free to concentrate on your audience and your presentation. Quiet and compact, it would go unnoticed if it wasn't so good to look at.

#### Perfectly projected images wherever you are

When you are on the move can you be sure the conditions will be right for your presentation?

With the Epson EB-1720 and EB-1725, clear and natural images are guaranteed in the lightest room, thanks to the innovative Epson E-TORL lamp technology which provides bright images rated at 3000 ANSI lumens.

#### A truly mobile solution

Weighing as little as 1.7kg and supplied with a compact, stylish carrying case this 3LCD projector is the perfect travel companion.

When you are on the move, peace of mind is ensured because ease-of-use and Epson's high reliability are designed into the EB-1720 and EMP-1725, backed up by the standard 3 year next day on site warranty.

#### Ready in seconds – simply plug and project

All that is needed to set up your projector is to plug it in, connect your source and within seconds you are ready to present. The projected image is instantly aligned thanks to automatic vertical keystone correction, and the projection level can be easily adjusted using the single foot release lever. When you have finished your presentation, simply switch off and pack away. With the instant off button there's no waiting around for the projector to cool down.

#### EB1720 Key features

- **High brightness and lightweight** - 3000 ANSI Lumens and only 1.7kg
- **No time wasting** - with quick startup, automatic vertical keystone correction and quick cool down
- **60" image from only 1.33 metres** - clear presentations in almost any room
- **AV mute slide** - for more effective presentations
- **Peace of mind warranty** - 3 year next day on site repair or replace in the UK, 3 year next day on site repair or loan in the Republic of Ireland.

#### EB-1725 Additional Key features

- **High brightness and lightweight** - 3000 ANSI Lumens and only 1.8kg
- Present directly and securely through a wireless network
- Operate 4 projectors simultaneously, to create a panorama or show different applications.
- Monitor and control projectors remotely using Epson's EMP Monitor software
- Certified for Windows Vista™ Network Projector function
- Go light, leave your PC behind. Simply plug in your USB key and start your presentations, slide shows or movies.
- Easy connection with Epson's exclusive 3 in 1 USB display

\*excluding "Home Basic Edition"

#### Special EB-1725 EasyMP features explained

##### Wireless connection

- Present directly and securely through a wireless network. It is possible to send video data with sound. Remote management of all your networked projectors via wireless LAN or optional wired LAN.
- Setting up the wireless connection for the first time takes just 60 seconds. Every time after that you just plug the supplied USB key into your computer, wait about 10 seconds and your desktop will be projected.
- Operate 4 projectors simultaneously from one computer, to create a panorama or show different applications.
- Monitor and control projectors remotely using Epson's EMP Monitor software. Configure email alerts to identify maintenance requirements before a problem occurs or save running costs and lamp life by setting timers to switch projectors off when not in use.
- Connect the Epson EB-1725 to a PC with Windows Vista™\* and launch the network projector function (WLAN or LAN): no need to install additional applications, no administrator rights needed.

##### PC Free

- Go light, leave your PC behind. Simply plug in your USB key and start your presentations, slide shows or movies.

##### Exclusive 3 in 1 USB Display

- A single, long USB cable replaces three to carry all signals — image, sound and mouse control data (for mouse cursor and Page Up/Down). This unique and extremely convenient feature means no more having to play with wires in front of your audience. And combined with the remote control you can also project and slideshow your presentation easily at a distance.



Connections and speaker

Focus and zoom, indicator lights, control



## Ordering information

<b>Description</b>	EB-1720 LCD Projector
<b>Part Number</b>	V11H269B40**
<b>Barcode</b>	8715946420448
<b>Carton Size</b>	361 x 493 x 193 mm
<b>Carton Weight</b>	4.6Kg

<b>Description</b>	EB-1725 LCD Projector
<b>Part Number</b>	V11H268B40**
<b>Barcode</b>	8715946420455
<b>Carton Size</b>	361 x 493 x 193 mm
<b>Carton Weight</b>	4.8Kg

\*\* The last two letters may vary depending on the version. See the RRP list or Trade Price lists for correct part numbers.

## Screen size and projection distance

Use the Epson Projection Distance Calculator software available from [www.epson.co.uk](http://www.epson.co.uk) for distances and screen sizes not shown below.

### 4:3 Aspect Ratio

Screen [inch]	Projection distance						Offset A		Offset B	
	Wide			Tele			Wide = Tele			
	cm	inch	foot	cm	inch	foot	V1 cm	V1 inch	V2 cm	V2 inch
30	65	26	2.1	80	32	2.6	-7	-2.6	39	15.4
40	88	35	2.9	108	42	3.5	-9	-3.4	52	20.6
50	111	44	3.6	136	53	4.4	-11	-4.3	65	25.7
60	133	53	4.4	163	64	5.4	-13	-5.1	78	30.9
80	179	70	5.9	218	86	7.2	-17	-6.9	105	41.1
100	224	88	7.4	274	108	9	-22	-8.6	131	51.4
150	338	133	11.1	412	162	13.5	-33	-12.9	196	77.1
200	451	178	14.8	560	216	18	-44	-17.1	261	102.9
250	565	222	18.5	688	271	22.6	-54	-21.4	327	128.6
300	678	267	22.3	826	325	27.1	-65	-25.7	392	154.3

### 16:9 Aspect Ratio

Screen [inch]	Projection distance						Offset A		Offset B	
	Wide			Tele			Wide = Tele			
	cm	inch	foot	cm	inch	foot	V1 cm	V1 inch	V2 cm	V2 inch
27.5	65	26	2.1	80	32	2.6	-1	-0.3	33	13.2
30	71	28	2.3	88	35	2.9	-1	-0.4	36	14.4
40	96	38	3.2	118	46	3.9	-1	-0.5	49	19.1
50	121	48	4	148	58	4.9	-1	-0.6	61	23.9
60	146	57	4.8	178	70	5.8	-2	-0.7	73	28.7
80	195	77	6.4	238	94	7.8	-2	-0.9	97	38.3
100	245	96	8	298	117	9.8	-3	-1.2	122	47.9
150	368	145	12.1	449	177	14.7	-4	-1.8	182	71.8
200	492	194	16.1	599	236	19.6	-6	-2.3	243	95.7
250	616	242	20.2	749	295	24.6	-7	-2.9	304	119.6
275	678	267	22.3	826	325	27.1	-8	-3.2	335	131.8

### 16:10 Aspect Ratio

Screen [inch]	Projection distance						Offset A		Offset B	
	Wide			Tele			Wide = Tele			
	cm	inch	foot	cm	inch	foot	V1 cm	V1 inch	V2 cm	V2 inch
28.3	65	26	2.1	80	32	2.6	-3	-1.1	35	13.9
30	69	27	2.3	85	34	2.8	-3	-1.1	38	14.8
40	94	37	3.1	115	45	3.8	-4	-1.5	50	19.7
50	118	46	3.9	144	57	4.7	-5	-1.9	63	24.6
60	142	56	4.6	173	68	5.7	-6	-2.3	75	29.5
80	190	75	6.2	232	91	7.6	-8	-3	100	39.4
100	238	94	7.8	290	114	9.5	-10	-3.8	125	49.2
150	358	141	11.8	436	172	14.3	-14	-5.7	188	73.8
200	479	188	15.7	583	229	19.1	-19	-7.6	250	98.4
250	599	236	19.6	729	287	23.9	-24	-9.5	313	123
283	678	267	22.3	826	325	27.1	-27	-10.7	354	139.3

## Lightweight and compact – includes carry case

The stylish carry case provides protection for your projector and allows accessories to be held securely which are accessible in seconds.



## Optional Accessories

Spare Lamp (ELPLP48)  
V13H010L48



Air Filter Set (ELPAF19)  
V13H134A19



Soft Carrying Case (ELPKS16B)  
For carrying the projector and a laptop.  
V12H001K1B



Ceiling Mount (ELPMB23)  
Can be used with either EPLFP13 or ELPFP14 ceiling pipes.  
V12H003B23




Ceiling Pipes  
450mm (ELPFP13)  
**V12H003P13**  
700mm (ELPFP14)  
**V12H003P14**




Ethernet Unit With  
LAN Cover  
(ELPAP02B)  
**V12H005M0B**

50" Portable  
Screen (ELPSC06)  
**V12H002S06**

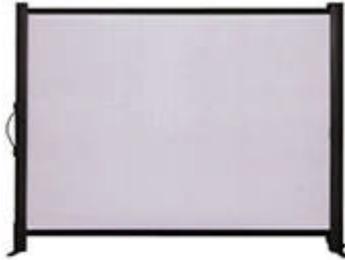

60" Portable  
Screen (ELPSC07)  
**V12H002S07**

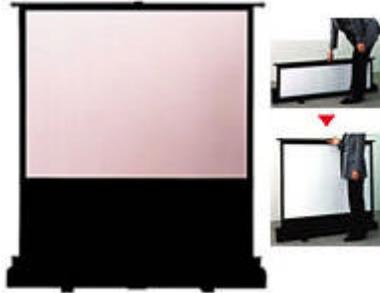

80" Portable  
Screen (ELPSC08)  
**V12H002S08**

VGA Computer  
Cable HD-15 to  
HD-15 1.8m  
(ELPKC02)  
**V12H005C02**



VGA Computer  
Cable HD-15 to  
HD-15 3.0m  
(ELPKC09)  
**V12H005C09**

VGA Computer  
Cable HD-15 to  
HD-15 20m  
(ELPKC10)  
**V12H005C10**

Component Video  
Cable (ELPKC19)  
**V12H005C19**



## What's in the Box?

**Projector**



**Carry Case**



**Remote Control**



**2 x AA alkali batteries**  
for the remote control



**Wireless LAN Unit (EB-1725 ONLY)**



**Quick Wireless Connection  
USB Key (EB-1725 ONLY)**



**Password Protect sticker**

When Password Protect is enabled, attach this to the projector in a clearly visible location to increase anti-theft effectiveness.



**Power Cable**  
3.0m 240V cable




**Computer Cable**  
Mini D-Sub 15-pin/mini D-Sub 15-pin, 1.8 m (6 ft.)  
Use when projecting images from a computer



**USB cable (EB-1725 ONLY)**  
3.0m. Use when connecting to a computer with a USB port to use the USB display or wireless mouse function.



**Audio Adapter**  
3.5 mm Stereo mini plug to RCA pin jack x 2 red/white, 15 cm. To connect the projector to commercially-available RCA audio cables for sound input or output.



**User Manual Set**

**EPSON Projector Software  
CDROM**

## Specifications

<b>MODEL</b>	EB-1720	EB-1725
<b>Projection System</b>	RGB liquid crystal shutter projection system	RGB liquid crystal shutter projection system
<b>Projection Method</b>	Front / Rear / Ceiling mount	Front / Rear / Ceiling mount
<b>Specification of Main Parts</b>		
<b>LCD</b>		
<b>Size</b>	0.7-inch with MLA	0.7-inch with MLA
<b>Driving Method</b>	Poly-silicon TFT active matrix	Poly-silicon TFT active matrix
<b>Pixel Number</b>	786432 dots (1024 x 768) x 3	786432 dots (1024 x 768) x 3
<b>Native Resolution</b>	XGA	XGA
<b>Aspect Ratio</b>	4:3	4:3
<b>Pixel Arrangement</b>	Stripe	Stripe
<b>Refresh Rate</b>	50 Hz - 72 Hz	50 Hz - 72 Hz
<b>Projection Lens</b>		
<b>Type</b>	Manual zoom / Manual focus	Manual zoom / Manual focus
<b>F-Number</b>	1.58 - 1.68	1.58 - 1.68
<b>Focal Length</b>	16.1mm - 19.3 mm	16.1mm - 19.3 mm
<b>Zoom Ratio</b>	1 - 1.2	1 - 1.2
<b>Lens Cover</b>	Slide lens shutter	Slide lens shutter
<b>Lamp</b>		
<b>Type</b>	E-TORL 170 W UHE	E-TORL 170 W UHE
<b>Life</b>	3000 hours (High bright) / 4000 hours (Low bright)	3000 hours (High bright) / 4000 hours (Low bright)
<b>Optical System</b>	Dichroic mirror separation & prism combine method	Dichroic mirror separation & prism combine method
<b>Screen Size (Projected Distance)</b>	30" to 300" [ m to m] (Zoom: Wide), 30" to 300" [ m to m] (Zoom: Tele) 60" screen 1.33 m -1.63 m	30" to 300" [ m to m] (Zoom: Wide), 30" to 300" [ m to m] (Zoom: Tele) 60" screen 1.33 m -1.63 m
<b>Offset</b>	6:1	6:1
<b>Light output(Brightness)</b>		
<b>High Brightness Mode</b>	3000 lm (Colour mode: Game, Zoom: Wide)	3000 lm (Colour mode: Game, Zoom: Wide)
<b>Low Brightness Mode</b>	1900 lm (Colour mode: Game, Zoom: Wide)	1900 lm (Colour mode: Game, Zoom: Wide)
<b>Contrast</b>	2000:1	2000:1
<b>Brightness Uniformity</b>	89%	89%
<b>Colour Reproduction</b>	Full-colour (16.77million colours )	Full-colour (16.77million colours )
<b>Video Quality</b>	Simple Interlace-Progressive conversion	Simple Interlace-Progressive conversion
<b>Sound Output</b>	1W Monaural	1W Monaural
<b>Speaker</b>	35 x 20 mm x 1	35 x 20 mm x 1
<b>Function</b>	Pointer, User logo, A/V mute, Freeze, E-Zoom, Help	Pointer, User logo, A/V mute, Freeze, E-Zoom, Help
<b>Remote Control Infrared Receiver Position / Distance / Directivity</b>	Front & rear (selectable), 6 m Front Right / Left : -60 to +60 degrees Upper / Lower : -30 to +45 degrees Rear Right / Left : -30 to +30 degrees Upper / Lower : -30 to +30 degrees	Front & rear (selectable), 6 m Front Right / Left : -60 to +60 degrees Upper / Lower : -30 to +45 degrees Rear Right / Left : -30 to +30 degrees Upper / Lower : -30 to +30 degrees
<b>Effective Scanning Frequency Range (Analogue)</b>		
<b>Pixel Clock</b>	13.5 MHz to 162 MHz	13.5 MHz to 162 MHz
<b>Horizontal</b>	15 kHz to 92 kHz	15 kHz to 92 kHz
<b>Vertical</b>	50 Hz to 85 Hz	50 Hz to 85 Hz
<b>Effective Scanning Frequency Range (Digital)</b>		
<b>Pixel Clock</b>	25MHz to 135MHz	25MHz to 135MHz
<b>Horizontal</b>	15KHz to 80KHz	15KHz to 80KHz
<b>Vertical</b>	50Hz to 85Hz	50Hz to 85Hz
<b>Adjustment Function</b>		
<b>Foot Adjuster</b>	Front-centre	Front-centre
<b>Tilt Angle</b>	0 to 12 degrees	0 to 12 degrees
<b>Keystone Correction</b>	Vertical : -30 to +30 degrees ( Zoom: Tele)	Vertical : -30 to +30 degrees ( Zoom: Tele)
<b>Auto Keystone Correction</b>	Implemented (Vertical) Vertical : -30 to +30 degrees ( Zoom: Tele)	Implemented (Vertical) Vertical : -30 to +30 degrees ( Zoom: Tele)
<b>Source Search</b>	Yes	Yes
<b>Auto Detection of RGB/Component</b>	Yes	Yes
<b>Multi Screen Colour Adjustment</b>	N/A	Yes
<b>Operation Panel Protected Function</b>	Yes	Yes
<b>Password Protected Function (Security function)</b>	Yes (Protection of User logo, Network)	Yes (Protection of User logo, Network)
<b>Analogue RGB I/O</b>		
<b>Display Performance</b>		
<b>Native</b>	1024 x 768 dots	1024 x 768 dots
<b>Input Signal</b>		
<b>Signal Type</b>	Separate signal	Separate signal
<b>Video Signal</b>	Analogue(0.7 Vp-p,75 ohm/ Mac0.714 Vp-p, 75 ohm)	Analogue(0.7 Vp-p,75 ohm/ Mac0.714 Vp-p, 75 ohm)
<b>Sync. Signal</b>	Separate (positive & negative, bi-polarity 2-5 Vp-p)/ Composite (positive & negative, bi-polarity 2-5 Vp-p)/ Sync-on-green(negative, 0.3 Vp-p)	Separate (positive & negative, bi-polarity 2-5 Vp-p)/ Composite (positive & negative, bi-polarity 2-5 Vp-p)/ Sync-on-green(negative, 0.3 Vp-p)
<b>Audio Signal</b>	500 mVrms / 47 k-ohm	500 mVrms / 47 k-ohm
<b>Input Terminal</b>		
<b>Video</b>	D-sub 15pin x 1 Blue moulding	D-sub 15pin x 1 Blue moulding
<b>Audio</b>	Stereo mini-jack x 1 (Audio In only)	Stereo mini-jack x 1 (Audio In or Out are selectable on OSD menu)
<b>Video I/O</b>		
<b>Display Performance</b>	NTSC: 560 lines PAL: 560 lines (Depend on observation of the multi-burst pattern)	NTSC: 560 lines PAL: 560 lines (Depend on observation of the multi-burst pattern)
<b>Input Signal</b>		
<b>Video Standard</b>	NTSC / NTSC4.43 / PAL / M-PAL / N-PAL / PAL60 /	NTSC / NTSC4.43 / PAL / M-PAL / N-PAL / PAL60 /

<b>Video Signal</b>	SECAM	SECAM
	Composite Video(1.0 Vp-p/ Sync.negative, 75 ohm) / S-Video(Luminous0.714 Vp-p, Chrominous 0.286 Vp-p, 75 ohm)/ Component Video(Analogue Y level 0.7 V 75 ohm/ Cr Cb level +/-0.35 V 75 ohm/ sync.negative 0.3 V or 3-state+/- 0.3 V on Y)/ RGB Video(0.7 Vp-p,75 ohm/ Mac 0.714 Vp-p,75 ohm)	Composite Video(1.0 Vp-p/ Sync.negative, 75 ohm) / S-Video(Luminous0.714 Vp-p, Chrominous 0.286 Vp-p, 75 ohm)/ Component Video(Analogue Y level 0.7 V 75 ohm/ Cr Cb level +/-0.35 V 75 ohm/ sync.negative 0.3 V or 3-state+/- 0.3 V on Y)/ RGB Video(0.7 Vp-p,75 ohm/ Mac 0.714 Vp-p,75 ohm)
<b>Audio Signal</b>	500 mVrms / 47 k-ohm	500 mVrms / 47 k-ohm
<b>Input Terminal</b>		
<b>Video</b>	Composite Video: RCA (Yellow) x 1	Composite Video: RCA (Yellow) x 1
	S-Video: Mini DIN	S-Video: Mini DIN
	Component Video: D-sub 15pin Blue moulding (in common with Analogue RGB connector)	Component Video: D-sub 15pin Blue moulding (in common with Analogue RGB connector)
<b>Audio</b>	RGB Video: D-sub 15pin Blue moulding (in common with Analogue RGB connector)	RGB Video: D-sub 15pin Blue moulding (in common with Analogue RGB connector)
	Stereo mini-jack x 1 (Audio In only)	Stereo mini-jack x 1 (Audio In or Out are selectable on OSD menu)
<b>USB Display With Audio</b>	N/A	YES
<b>Control I/O</b>		
<b>USB I/O</b>	Type B x1 (for mouse, K/B, control)	Type B x1 (for mouse, K/B, control,USB Display) Type A x1 (for IM-X)
<b>Network I/O</b>		
<b>Supported Wireless LAN unit</b>	N/A	Standard accessory (WN6501CEP) only
<b>Supported Ethernet unit</b>	N/A	Optional unit (ELPAP02B) only
<b>Operating Temperature</b>	5 °C to 35 °C <41 °F to 95 °F> ( 20%-80% Humidity )	5 °C to 35 °C <41 °F to 95 °F> ( 20%-80% Humidity )
<b>Operating Altitude</b>	0 m to 2286 m<0 ft to 7500 ft> ( over 1500 m / 4,921 ft :with High altitude mode)	0 m to 2286 m<0 ft to 7500 ft> ( over 1500 m / 4,921 ft :with High altitude mode)
<b>Direct Power On</b>	Yes	Yes
<b>Start-up Period</b>	6 seconds warm-up period: 30 seconds	6 seconds warm-up period: 30 seconds
<b>Cool-down Period</b>	Instant off (Ceiling : 20 seconds)	Instant off (Ceiling : 20 seconds)
<b>Exhaust Direction</b>	Front Direction of product	Front Direction of product
<b>Power Supply Voltage</b>	100-240 V AC ±10% , 50/60 Hz	100-240 V AC ±10% , 50/60 Hz
<b>Power Consumption</b>		
<b>100-120 V area (JAPAN, USA, etc)</b>		
<b>Lamp On</b>	243 W	243 W
<b>Standby (Network On)</b>	-	9 W
<b>Standby (Network Off)</b>	4 W	4 W
<b>230 V area (Europe etc)</b>		
<b>Lamp On</b>	230W	230W
<b>Standby (Network On)</b>	-	10 W
<b>Standby (Network Off)</b>	5.5 W	5.5 W
<b>Dimension</b>		
<b>Not including protruding parts (D x W x H)</b>	202 x 284 x 65mm	202 x 284 x 65mm
<b>Maximum dimension (D x W x H)</b>	202 x 284 x 73 mm Within Feet	202 x 284 x 73 mm Within Feet
<b>Weight</b>	Approx. 3.74 • bs / 1.7 Kg	Approx.3.96 • bs / 1.8Kg
<b>Fan Noise</b>		
<b>High Brightness mode</b>	39€ •	39€ •
<b>Low Brightness mode</b>	30€ B	30€ B
<b>Compatible Standard</b>		
<b>Safety</b>		
<b>US</b>	UL60950-1 1st edition (cTUVus Mark)	UL60950-1 1st edition (cTUVus Mark)
<b>Canada</b>	CSA C22.2 No.60950-1	CSA C22.2 No.60950-1
<b>Japan</b>	The electrical appliance safety law / TV receiver	The electrical appliance safety law / TV receiver
<b>Europe</b>	IEC 60950-1 1st edition (CE Marking)	IEC 60950-1 1st edition (CE Marking)
<b>Korea</b>	EK	EK
<b>China</b>	CCC (GB4943)	CCC (GB4943)
<b>Singapore</b>	PSB	PSB
<b>EMC</b>		
<b>US</b>	FCC part 15B class B	FCC part 15B class B
<b>Canada</b>	ICES-003 class B	ICES-003 class B
<b>Japan</b>	The electrical appliance safety law / TV receiver	The electrical appliance safety law / TV receiver
<b>CE(Europe)</b>	EMC Directive • 2004/108/EC•	EMC Directive • 2004/108/EC•
<b>Korea</b>	MIC-Mark	MIC-Mark
<b>China</b>	CCC (GB9254, GB 17625.1)	CCC (GB9254, GB 17625.1)
<b>Australia/New Zealand</b>	C-tick Mark	C-tick Mark
<b>Environmental Protection</b>		
<b>US</b>	State's law for packages	State's law for packages
<b>Japan</b>	Recycling regulation for packages	Recycling regulation for packages
<b>Germany &amp; France</b>	A law for waste product evasion	A law for waste product evasion
<b>CE(Europe)</b>	Dioxide regulation	Dioxide regulation
<b>All countries</b>	Recycling regulation	Recycling regulation
<b>Easy MP Part</b>		
<b>Function</b>		
<b>Projector control and projector management via network</b>	N/A	Yes
<b>AMX Device Discovery</b>	N/A	Yes
<b>E-mail notification</b>	N/A	Yes
<b>SNMP</b>	N/A	Yes
<b>Web control</b>	N/A	Yes
<b>PC Free</b>	N/A	Yes

<b>Photo Image and Movie Network Presentation• Network and USB• PJ-Link Network Projector for Windows Vista Quick Wireless Connection</b>	N/A	Yes
	N/A	Yes
	N/A	Yes
	N/A	Yes
<b>Software</b>		
EMP Monitor Ver.4.22 (for Windows)	N/A	Yes
EMP NS Connection Ver.2.40 (for Windows)	N/A	Yes
EMP NS Connection Ver.2.40 (for Mac)	N/A	Yes
quick wireless connection Ver.1.0 (for Windows)	N/A	Yes
UD Ver.1.4 (for Windows)	N/A	Yes
EMP Slide Maker2 (for Windows)	N/A	Yes
<b>Security ( Wireless LAN )</b>	N/A	WEP• WPA-PSK(TKIP)• WPA-PSK(AES) EAP-TLS• EAP-TTLS/MD5• EAP-TTLS/MS-CHAPv2• PEAP/MS-CHAPv2• PEAP/GTC LEAP• EAP-Fast/MS-CHAPv2• EAP-Fast/GTC
<b>Supplied Accessories</b>		
<b>Power Cable</b>	3.0 m	3.0 m
<b>Computer Cable</b>	1.8 m D-sub 15pin (Male) - D-sub 15pin (Male)	1.8 m D-sub 15pin (Male) - D-sub 15pin (Male)
<b>USB Cable</b>	N/A	3.0m,USB A/USB B HI-SPEED
<b>Remote Control</b>	Compact type	Compact type
<b>Battery</b>	Manganese AA x 2	Manganese AA x 2
<b>Audio Adapter</b>	3.5 mm stereo miniplug (male) <-> RCA jack x2(female) 15 cm	3.5 mm stereo miniplug (male) <-> RCA jack x2(female) 15 cm
<b>Soft Carrying Case</b>	Yes	Yes
<b>Password Protect Sticker</b>	Yes	Yes
<b>Wireless LAN unit</b>	N/A	Yes 802.11a/11b/11g (WN6501CEP)
<b>Bundled Software</b>	N/A	EPSON Projector Software for Meeting & Presentation(CD-ROM)
<b>Quick Wireless Connection USB Key</b>	N/A	NEW USB Flash Memory
<b>User's Manual Set</b>	Yes	Yes
<b>Optional Accessories</b>		
<b>Spare Lamp</b>	ELPLP48 V13H010L48 / V13H010C48 (For ECC)	ELPLP48 V13H010L48 / V13H010C48 (For ECC)
<b>Air Filter Set 2 sheets of filters</b>	ELPAF19 V13H134A19 / V13H134C19 (For ECC)	ELPAF19 V13H134A19 / V13H134C19 (For ECC)
<b>Soft Carrying Case (for PC)</b>	ELPKS16B	ELPKS16B
<b>50" Portable Roll Screen</b>	ELPSC06	ELPSC06
<b>60" Portable Roll Screen</b>	ELPSC07	ELPSC07
<b>80" Portable Roll Screen</b>	ELPSC08	ELPSC08
<b>100 Type Screen</b>	ELPSC10	ELPSC10
<b>Ethernet unit</b>	N/A	ELPAP02B With LAN Unit Cover
<b>Computer Cable</b>		
<b>HD15 / HD15, 1.8m</b>	ELPKC02	ELPKC02
<b>HD15 / HD15, 3.0m</b>	ELPKC09	ELPKC09
<b>HD15 / HD15, 20.0m</b>	ELPKC10	ELPKC10
<b>Component video cable</b>		
<b>HD15 / RCA male x3, 3.0m</b>	ELPKC19	ELPKC19
<b>Ceiling Mount</b>	ELPMB 23	ELPMB 23
<b>Pipe 450mm</b>	ELPFP13	ELPFP13
<b>Pipe 700mm</b>	ELPFP14	ELPFP14
<b>Warranty</b>	UK: 3 years on-site next business day repair or replace Ireland: 3 years on-site next business day repair or loan	UK: 3 years on-site next business day repair or replace Ireland: 3 years on-site next business day repair or loan

Errors and omissions excepted, all specifications are subject to change without notice