

# Big screen view from an ultra short distance









60" image from a distance of only 73cm



Shadow-free images on interactive whiteboards



Superior brightness – 2500 Lumens



8W speaker – all-in-one multimedia setup



**Enhanced security features** 



Whisper quiet - only 28dB



No maintenance – filter free design

**EX525ST**Digital DLP® Projector


# **Extreme Short Projection**

The pinnacle of image excellence; the EX525ST gives big screen projection from very short distances. Installed or portable the EX525ST integrates 8W audio and extensive connectivity in an all-in-one design. At 2500 Lumens, this native XGA projector is easy to use and allows for projection without shadows for the best business and education presentations.


#### **SHORT THROW LENS**

Project powerful images from virtually any location; the EX525ST can project an impressive 60-inch diagonal image from just 73cm from the screen. Stand-alone or ceiling mounted the EX525ST eliminates shadows on the screen and allows you to present with ease.

# **Current Projectors**

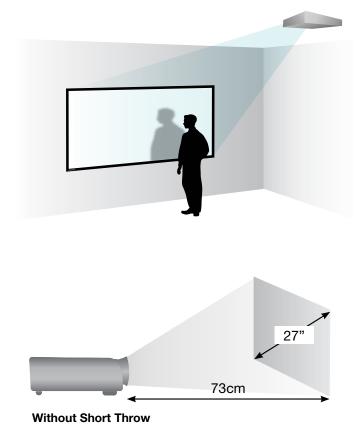

# EX525ST - Shadow-free Images

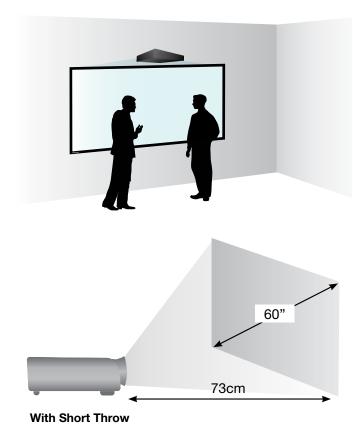

#### **MAINTENANCE FREE**

DLP® technology ensures lower cost of ownership, longer life and improved reliability compared to LCD projection technology.

Save time and money with the filter free projector design – no more regular filter replacement or cleaning required.




#### **EXTENSIVE CONNECTIVITY**

The EX525ST can accept a wide variety of computer and video input signals including: DVI, VGA, SCART, Component, S-Video, Composite, RS232 and RJ45.


#### **Network Monitoring and Control**

For remote control and access from a web browser, manage and monitor the projectors over a LAN network via RJ45.

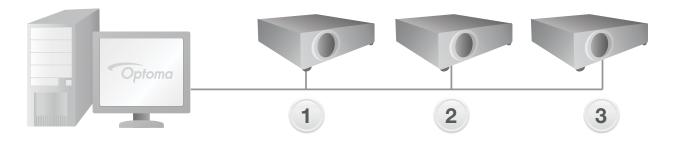

#### **HOOK IT UP TO ALMOST ANYTHING!**

The EX525ST is easy to use with most of your home entertainment and gaming devices. Simply connect, power up and project for the ultimate big screen viewing experience.

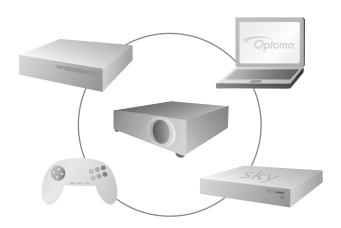

#### **AMAZING COLOURS**


You'll be amazed with the vibrant lifelike colours, a unique function of the Optoma Colour Enhancement Technology that brings to life any image displayed.



# **Colour Performance Guarantee**

Optoma guarantees colour quality will stay as new for 10 years\*

We are so confident that the EX525ST colours will not fade that we guarantee the colours will remain vibrant and vivid, even after many years of use.

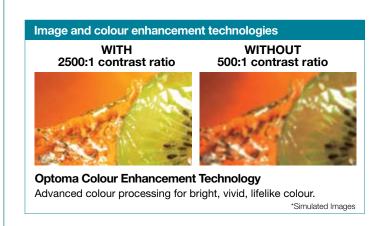

#### **POWERFUL BUILT-IN 8W SPEAKERS**

All-in-one, portable, built-in audio speakers



Only a small distance is required between the projector and the screen.

#### **PORTABLE OR INSTALLED**

Small enough to be portable from room to room or perfectly suited for installation with interactive whiteboards.



With the inclusion of a tough security bar, Kensington lock, Key pad lock and password protection.

#### **SAVING TIME AND ENERGY**

It takes less than 15 seconds for the projector to power up and shutdown, so the EX525ST not only saves time but energy too. Timer Control function turns the projector off when it is unused, saving energy and extending the lamp life of the projector to an astonishing 4000 hours\*\*.

#### **Auto Power Off**

If after a pre-determined time the projector does not receive a signal, it will turn itself off, conserving power and extending the life of the lamp.

#### Fast Switch On

Display an image on screen quickly after switching the projector on.

#### **Low Power Standby Mode**

Reduces energy consumption.

# **CUSTOMISED START UP SCREEN**

First impressions are important so set the company logo as the start up screen to make that impression last.

#### **EASY TO USE**

### **Quiet Operation**

The EX525ST features Optoma's whisper-quiet design, highly-effective in reducing audible noise levels to 28dB.

#### **Preset Modes**

The EX525ST is ideal for much more than presentations. Six modes including a blackboard mode for the classroom, provide instant optimised settings for different applications.



#### **Specifications**

Native Resolution  XGA (1280 x 768  Compressed Resolution  SXGA (1280 x 1024)  Brightness - BRIGHT mode  2500 Lumens  Brightness - STD mode  Contrast  2500:1  Noise Level  28dB  Lamp Life**  4000/3000 (STD/BRIGHT mode)  Frojection Lens  F Number  2.59  Focus Length  6.97mm @ 0.73m  Focus/Zoom Type Manual Focus / 2.0x Digital Zoom  Throw Ratio  0.6:1 (Projection Distance)  1.04m - 7.72m (41.05* - 303.75*) Diagonal 4:3  Display Technology  Single 0.55* YGA type x DMD chip DLP® Technology by Texas Instruments  Weight / Dimensions (W x D x H)  Remote Control  INPUTS  DVI- (HDCP), Digital RGB (HMI wia adaptor)  15 Pin D-Sub VGA (SCART & Component via adaptor)  S-Video 4 Pin Mini Din  Composite RCA  Audio Mini Jack - Audio computer inputs  2 x Stereo RCA - Audio video inputs  USS (remote mouse)  CONTROL  R45  RS232 - 3 Pin Mini DIN  OUTPUT  15 Pin D-Sub VGA (monitor loop-through)  Audio Mini Jack  Audio Mini Jack  4:3 Native, 16:9 Compatibile  Keystone Correction  ± 20 Degrees Vertical  On Screen Display  18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  85%  Displayable Colours  16 TMIIlion  Horizontal Scan Rate  91kHz  Vertical Scan Rate  91kHz  Vertic		EX525ST				
Brightness - STD mode	Native Resolution	XGA 1024 x 768				
Brightness - STD mode	Compressed Resolution	SXGA (1280 x 1024)				
Contrast   Z500:1   Noise Level   Z8dB	Brightness - BRIGHT mode	2500 Lumens				
Noise Level   Lamp Life**   4000/3000 (STD/BRIGHT mode)	Brightness - STD mode	1500 Lumens				
Lamp Life**	Contrast	2500:1				
Projection Lens	Noise Level	28dB				
Focus Length Focus/Zoom Type Throw Ratio  O.6:1 (Projection Distance country per throw Ratio Ra	Lamp Life**	4000/3000 (STD/BRIGHT mode)				
Focus/Zoom Type Throw Ratio  Projection Distance  0.5 - 3.7m  Image Size  1.04m - 7.72m (41.05" - 303.75") Diagonal 4:3  Display Technology  Single 0.55" XGA type X DMD chip DLP® Technology by Texas Instruments  Weight / Dimensions (W x D x H)  1.5 pin D-Sub VGA (SCART & Component via adaptor)  16 pin D-Sub VGA (SCART & Component via adaptor)  16 pin D-Sub VGA (SCART & Component via adaptor)  17 pin D-Sub VGA (SCART & Component via adaptor)  18 pin D-Sub VGA (SCART & Component via adaptor)  19 pin D-Sub VGA (SCART & Component via adaptor)  10 pin D-Sub VGA (SCART & Component via adaptor)  10 pin D-Sub VGA (SCART & Component via adaptor)	Projection Lens	F Number	2.59			
Throw Ratio 0.6:1 (Projection Distance:Image Width)  Projection Distance 0.5 - 3.7m   Image Size 1.04m - 7.72m (41.05" - 303.75") Diagonal 4:3  Display Technology Single 0.55" XGA type X DMD chip DLP® Technology by Texas Instruments   Weight / Dimensions (W x D x H) 4.3 kg / 339 x 276 x 122mm   Remote Control Full function remote with mouse control and direct source selecting   INPUTS DVI-I (HDCP), Digital RGB (HDMI via adaptor)   15 Pin D-Sub VGA (SCART & Component via adaptor)   5-Video 4 Pin Mini Din   Composite RCA   Audio Mini Jack - Audio computer inputs   2 x Stereo RCA - Audio video inputs   USB (remote mouse)    CONTROL   R5232 - 3 Pin Mini DIN    OUTPUT   15 Pin D-Sub VGA (monitor loop-through)   Audio Mini Jack   8W Speaker   Aspect Ratio   4:3 Native, 16:9 Compatible   Keystone Correction   2 Degrees Vertical   On Screen Display   18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic   Video Compatibility   PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i   Uniformity   85%   Displayable Colours   16.7 Million   Horizontal Scan Rate   91kHz   Vertical Scan Rate   91kHz   Power Consumption   280W Maximum, Standby mode < 5W (< 1W Optional)   Operating Conditions   Operating S - 35°C, 85% Humidity (Max), 3000m Altitude (Max)   Security   Security bar, Kensington Lock Port, Password Protection   Standard Accessories   Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card   RoHS   Compliant   Warranty   Warshy Dode    Scale Mini DLR   Scale Materia S   Scale Mini DLR   Scale Mini DLR   Scale Mini DLR   Scale Mini DLR   Scan Nateria S   Sca		Focus Length	6.97mm @ 0.73m			
Projection Distance Image Size 1.04m - 7.72m (41.05" - 303.75") Diagonal 4:3  Display Technology Single 0.55" XGA type X DMD chip DLP® Technology by Texas Instruments Weight / Dimensions (W x D x H) Remote Control Full function remote with mouse control and direct source selecting INPUTS DVI-I (HDCP). Digital RGB (HDMI via adaptor) 15 Pin D-Sub VGA (SCART & Component via adaptor) 5-Video 4 Pin Mini Din Composite RCA Audio Mini Jack - Audio computer inputs 2 x Stereo RCA - Audio video inputs USB (remote mouse)  CONTROL RJ45 RS232 - 3 Pin Mini DIN  OUTPUT 15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack Audio Mini Jack Audio Mini Jack Audio SW Speaker Aspect Ratio 4:3 Native, 16:9 Compatible Keystone Correction 10 Screen Display 11 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity 85% Displayable Colours 16.7 Million Horizontal Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 90wer Supply 100 - 240V, 50 - 60Hz Power Consumption 0perating Conditions 0perating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Scarling and Arabic Power Consumption 0perating Conditions 0perating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Scarling Aramy by country. Please see www.optomaeurope.com or ask your local supplier for details		Focus/Zoom Type	Manual Focus / 2.0x Digital Zoom			
Image Size Display Technology Single 0.55" XGA type X DMD chip DLP® Technology by Texas Instruments Weight / Dimensions (W x D x H) Remote Control Full function remote with mouse control and direct source selecting INPUTS DVI-I (HDCP), Digital RGB (HDMI via adaptor) 15 Pin D-Sub VGA (SCART & Component via adaptor) S-Video 4 Pin Mini Din Composite RCA Audio Mini Jack - Audio computer inputs 2 x Stereo RCA - Audio video inputs USB (remote mouse)  CONTROL RJ45 RS232 - 3 Pin Mini DIN OUTPUT 15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack Audio 8W Speaker Aspect Ratio 4:3 Native, 16:9 Compatible Keystone Correction Du Screen Display 18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity B5% Displayable Colours 16.7 Million Horizontal Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 56Hz Power Supply 100 - 240V, 50 - 60Hz Power Consumption Operating Conditions Operating Conditions Operating Conditions Operating 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card RoHS Compliant Lamp Warranty Wareham - 7.72m (AGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card Golds Compliant Control Control Control Cable Vour Compliant Varranty Warranty Warranty Warranty Warranty Warranty Warranty Warranty Warranty Wareham - 7.72m (AGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card		Throw Ratio	0.6:1 (Projection Distance:Image Width)			
Display Technology  Weight / Dimensions (W x D x H)  Remote Control  Full function remote with mouse control and direct source selecting  NPUTS  DVI-I (HDCP), Digital RGB (HDMI via adaptor) 15 Pin D-Sub VGA (SCART & Component via adaptor) 5-Video 4 Pin Mini Din Composite RCA Audio Mini Jack - Audio video inputs USB (remote mouse)  CONTROL  RS232 - 3 Pin Mini DIN  OUTPUT  15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack  Audio BW Speaker  Aspect Ratio  4:3 Native, 16:9 Compatible  Keystone Correction  ± 20 Degrees Vertical  On Screen Display  18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  85%  Displayable Colours  16.7 Million  Horizontal Scan Rate  91kHz  Vertical Scan Rate  91kHz  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  280W Maximum, Standby mode < 5W (< 1W Optional)  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  ROHS  Compliant  Lamp Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Projection Distance	0.5 - 3.7m				
Weight / Dimensions (W x D x H)   4.3 kg / 339 x 276 x 122mm	Image Size		1.04m - 7.72m (41.05" - 303.75") Diagonal 4:3			
Remote Control  Full function remote with mouse control and direct source selecting  DVI-I (HDCP), Digital RGB (HDMI via adaptor)  15 Pin D-Sub VGA (SCART & Component via adaptor)  S-Video 4 Pin Mini Din  Composite RCA  Audio Mini Jack - Audio computer inputs  2 x Stereo RCA - Audio video inputs  USB (remote mouse)  CONTROL  RJ45  RS232 - 3 Pin Mini DIN  OUTPUT  15 Pin D-Sub VGA (monitor loop-through)  Audio Mini Jack  Audio Mini Jack  Audio SW Speaker  Aspect Ratio  4:3 Native, 16:9 Compatible  Keystone Correction  5 English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  85%  Displayable Colours  16:7 Million  Horizontal Scan Rate  91kHz  Vertical Scan Rate  56Hz  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  Compliant  Lamp Warranty  Warranty  Warranty  Warranty wary by country. Please see www.optomaeurope.com or ask your local supplier for details	Display Technology	Single 0.55" XGA type X DMD chip DLP® Technology by Texas Instruments				
INPUTS  DVI-I (HDCP), Digital RGB (HDMI via adaptor)  15 Pin D-Sub VGA (SCART & Component via adaptor)  S-Video 4 Pin Mini Din Composite RCA Audio Mini Jack - Audio computer inputs  2 x Stereo RCA - Audio video inputs  USB (remote mouse)  CONTROL  RS45  RS232 - 3 Pin Mini DIN  OUTPUT  15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack  Audio 8W Speaker  Aspect Ratio 4:3 Native, 16:9 Compatible  Keystone Correction ± 20 Degrees Vertical  On Screen Display  18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  B5%  Displayable Colours  16.7 Million  Horizontal Scan Rate  91kHz  Vertical Scan Rate  91kHz  Vertical Scan Rate  56Hz  Power Consumption  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  Warranty  Warranty  Warranty applier for details	Weight / Dimensions (W x D x H)					
15 Pin D-Sub VGA (SCART & Component via adaptor) S-Video 4 Pin Mini Din Composite RCA Audio Mini Jack - Audio computer inputs 2 x Stereo RCA - Audio video inputs USB (remote mouse)  CONTROL RJ45 RS232 - 3 Pin Mini DIN  OUTPUT 15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack Audio 8W Speaker Aspect Ratio 4:3 Native, 16:9 Compatible Keystone Correction 18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity 85% Displayable Colours 16.7 Million Horizontal Scan Rate 91KHz Vertical Scan Rate 91KHz Vertical Scan Rate 56Hz Power Supply 100 - 240V, 50 - 60Hz Power Consumption Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security Security Dar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card Warranty Warranty Warranty wary by country. Please see www.optomaeurope.com or ask your local supplier for details	Remote Control	Full function remote with mouse control and direct source selecting				
S-Video 4 Pin Mini Din Composite RCA Audio Mini Jack - Audio computer inputs 2 x Stereo RCA - Audio video inputs USB (remote mouse)  CONTROL RJ45 RS232 - 3 Pin Mini DIN  OUTPUT 15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack Audio 8W Speaker Aspect Ratio 4:3 Native, 16:9 Compatible Keystone Correction 18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity B55% Displayable Colours 16.7 Million Horizontal Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 56Hz Power Supply 100 - 240V, 50 - 60Hz Power Consumption 0perating Conditions 0perating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security Dar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card ROHS Compliant Lamp Warranty Warranty way vary by country. Please see www.optomaeurope.com or ask your local supplier for details	INPUTS	DVI-I (HDCP), Digital RGB (HDMI via adaptor)				
Composite RCA Audio Mini Jack - Audio computer inputs 2 x Stereo RCA - Audio video inputs USB (remote mouse)  CONTROL RJ45 RS232 - 3 Pin Mini DIN  OUTPUT 15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack  Audio 8W Speaker Aspect Ratio 4:3 Native, 16:9 Compatible Keystone Correction 12 20 Degrees Vertical On Screen Display 18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity 85% Displayable Colours 16.7 Million Horizontal Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 91kHz Power Consumption Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card Compliant Lamp Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details		15 Pin D-Sub VGA (SCART & Component via adaptor)				
Audio Mini Jack - Audio computer inputs 2 x Stereo RCA - Audio video inputs USB (remote mouse)  CONTROL RJ45 RS232 - 3 Pin Mini DIN  OUTPUT 15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack  Audio 8W Speaker Aspect Ratio 4:3 Native, 16:9 Compatible Keystone Correction 18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity 85% Displayable Colours 16.7 Million Horizontal Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 56Hz Power Supply 100 - 240V, 50 - 60Hz Power Consumption Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card Compliant Lamp Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details		S-Video 4 Pin Mini Din				
2 x Stereo RCA - Audio video inputs USB (remote mouse)  CONTROL RJ45 RS232 - 3 Pin Mini DIN  OUTPUT 15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack  Audio 8W Speaker Aspect Ratio 4:3 Native, 16:9 Compatible Keystone Correction 0n Screen Display 18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity 85% Displayable Colours 16.7 Million Horizontal Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 56Hz Power Supply 100 - 240V, 50 - 60Hz Power Consumption 280W Maximum, Standby mode < 5W (< 1W Optional) Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card RoHS Lamp Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details		Composite RCA				
USB (remote mouse)  RJ45 RS232 - 3 Pin Mini DIN  OUTPUT 15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack  Audio 8W Speaker  Aspect Ratio 4:3 Native, 16:9 Compatible  Keystone Correction  Dr Screen Display 18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity 85% Displayable Colours 16.7 Million  Horizontal Scan Rate 91kHz  Vertical Scan Rate 91kHz  Vertical Scan Rate 56Hz Power Supply 100 - 240V, 50 - 60Hz Power Consumption 280W Maximum, Standby mode < 5W (< 1W Optional) Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card Compliant Lamp Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details		Audio Mini Jack - Audio computer inputs				
CONTROL  RJ45 RS232 - 3 Pin Mini DIN  OUTPUT  15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack  Audio  8W Speaker Aspect Ratio  4:3 Native, 16:9 Compatible Keystone Correction  Dn Screen Display  18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity  85%  Displayable Colours  16.7 Million  Horizontal Scan Rate  91kHz  Vertical Scan Rate  91kHz  Vertical Scan Rate  56Hz  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  Compliant  Lamp Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details		2 x Stereo RCA - Audio video inputs				
RS232 - 3 Pin Mini DIN  OUTPUT 15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack  Audio 8W Speaker Aspect Ratio 4:3 Native, 16:9 Compatible Keystone Correction ± 20 Degrees Vertical On Screen Display 18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity 85% Displayable Colours 16.7 Million Horizontal Scan Rate 91kHz  Vertical Scan Rate 56Hz Power Supply 100 - 240V, 50 - 60Hz Power Consumption 280W Maximum, Standby mode < 5W (< 1W Optional) Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card RoHS Compliant Lamp Warranty Warranty warraby country. Please see www.optomaeurope.com or ask your local supplier for details		USB (remote mouse)				
OUTPUT  15 Pin D-Sub VGA (monitor loop-through) Audio Mini Jack  Audio  8W Speaker  Aspect Ratio  4:3 Native, 16:9 Compatible  Keystone Correction  18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  85%  Displayable Colours  16.7 Million  Horizontal Scan Rate  91kHz  Vertical Scan Rate  91kHz  Vertical Scan Rate  56Hz  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  Operating Conditions  Security  Setherical Scale, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS  Lamp Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	CONTROL	RJ45				
Audio Mini Jack  Audio 8W Speaker  Aspect Ratio 4:3 Native, 16:9 Compatible  Keystone Correction ± 20 Degrees Vertical  On Screen Display 18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity 85%  Displayable Colours 16.7 Million  Horizontal Scan Rate 91kHz  Vertical Scan Rate 56Hz  Power Supply 100 - 240V, 50 - 60Hz  Power Consumption 280W Maximum, Standby mode < 5W (< 1W Optional)  Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS Compliant 6 months or 1000 hours – whichever comes sooner  Warranty Warranty Warranty Please see www.optomaeurope.com or ask your local supplier for details		RS232 - 3 Pin Mini DIN				
Audio Aspect Ratio Aspect Ratio 4:3 Native, 16:9 Compatible Keystone Correction  18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity 85% Displayable Colours 16.7 Million Horizontal Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 56Hz Power Supply 100 - 240V, 50 - 60Hz Power Consumption Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security Security Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card RoHS Lamp Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	OUTPUT	15 Pin D-Sub VGA (monitor loop-through)				
Aspect Ratio  Keystone Correction  ± 20 Degrees Vertical  On Screen Display  18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  85%  Displayable Colours  Horizontal Scan Rate  91KHz  Vertical Scan Rate  91KHz  Vertical Scan Rate  56Hz  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS  Lamp Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details		Audio Mini Jack				
Keystone Correction  18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  85%  Displayable Colours  Horizontal Scan Rate  91KHz  Vertical Scan Rate  91KHz  Vertical Scan Rate  90K - 100 - 240V, 50 - 60Hz  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  Compliant  Lamp Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Audio	8W Speaker				
On Screen Display  18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  85%  Displayable Colours  16.7 Million  Horizontal Scan Rate  91kHz  Vertical Scan Rate  91kHz  Vertical Scan Rate  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  280W Maximum, Standby mode < 5W (< 1W Optional)  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  Compliant  Lamp Warranty  Gemonths or 1000 hours – whichever comes sooner  Warranty warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Aspect Ratio	4:3 Native, 16:9 Compatible				
Dutch, Russian, Finnish, Swedish, Greek, Norwegian, Danish, Hungarian, Czech, Turkish and Arabic  Video Compatibility PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i Uniformity 85% Displayable Colours 16.7 Million Horizontal Scan Rate 91kHz Vertical Scan Rate 91kHz Vertical Scan Rate 91c 100 - 240V, 50 - 60Hz Power Supply 100 - 240V, 50 - 60Hz Power Consumption Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security Security Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card ROHS Compliant Lamp Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Keystone Correction	± 20 Degrees Vertical				
Turkish and Arabic  Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  85%  Displayable Colours  16.7 Million  Horizontal Scan Rate  91kHz  Vertical Scan Rate  56Hz  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  280W Maximum, Standby mode < 5W (< 1W Optional)  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote,  Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  ROHS  Compliant  Lamp Warranty  G months or 1000 hours – whichever comes sooner  Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask  your local supplier for details	On Screen Display	18 Languages: English, German, French, Italian, Spanish, Portuguese, Polish,				
Video Compatibility  PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i  Uniformity  85%  Displayable Colours  16.7 Million  Horizontal Scan Rate  91kHz  Vertical Scan Rate  70wer Supply  100 - 240V, 50 - 60Hz  Power Consumption  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote,  Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS  Compliant  Lamp Warranty  G months or 1000 hours – whichever comes sooner  Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask  your local supplier for details		Dutch, Russian, Finnish, Swedish	n, Greek, Norwegian, Danish, Hungarian, Czech,			
Uniformity 85%  Displayable Colours 16.7 Million  Horizontal Scan Rate 91kHz  Vertical Scan Rate 56Hz  Power Supply 100 - 240V, 50 - 60Hz  Power Consumption 280W Maximum, Standby mode < 5W (< 1W Optional)  Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote,  Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS Compliant  Lamp Warranty 6 months or 1000 hours – whichever comes sooner  Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask  your local supplier for details		Turkish and Arabic				
Displayable Colours Horizontal Scan Rate 91kHz  Vertical Scan Rate 91kHz  Vertical Scan Rate 56Hz  Power Supply 100 - 240V, 50 - 60Hz  Power Consumption Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS Compliant Lamp Warranty 6 months or 1000 hours – whichever comes sooner  Warranty Warranty warranty please see www.optomaeurope.com or ask your local supplier for details	Video Compatibility	PAL SECAM 576i/p, NTSC 480i/p, HD 720p/1080i				
Horizontal Scan Rate  Vertical Scan Rate  56Hz  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  Operating Conditions  Security  Compliant  Compliant  Lamp Warranty  6 months or 1000 hours – whichever comes sooner  Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details		85%				
Vertical Scan Rate  Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  280W Maximum, Standby mode < 5W (< 1W Optional)  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS  Compliant  Lamp Warranty  6 months or 1000 hours – whichever comes sooner  Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Displayable Colours	16.7 Million				
Power Supply  100 - 240V, 50 - 60Hz  Power Consumption  280W Maximum, Standby mode < 5W (< 1W Optional)  Operating Conditions  Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  Compliant  Lamp Warranty  6 months or 1000 hours – whichever comes sooner  Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Horizontal Scan Rate	91kHz				
Power Consumption 280W Maximum, Standby mode < 5W (< 1W Optional)  Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)  Security Security bar, Kensington Lock Port, Password Protection  Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS Compliant  Lamp Warranty 6 months or 1000 hours – whichever comes sooner  Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Vertical Scan Rate	56Hz				
Operating Conditions Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max) Security Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card RoHS Compliant Lamp Warranty 6 months or 1000 hours – whichever comes sooner Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Power Supply	100 - 240V, 50 - 60Hz				
Security Security bar, Kensington Lock Port, Password Protection Standard Accessories Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card RoHS Compliant Lamp Warranty 6 months or 1000 hours – whichever comes sooner Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Power Consumption	280W Maximum, Standby mode < 5W (< 1W Optional)				
Standard Accessories  Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote, Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS  Compliant  Lamp Warranty  6 months or 1000 hours – whichever comes sooner  Warranty  Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Operating Conditions	Operating: 5 - 35°C, 85% Humidity (Max), 3000m Altitude (Max)				
Batteries x 2, Quick Start Guide, CD User Manual, Warranty Card, WEEE Card  RoHS Compliant  Lamp Warranty 6 months or 1000 hours – whichever comes sooner  Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Security	Security bar, Kensington Lock Port, Password Protection				
RoHS Compliant  Lamp Warranty 6 months or 1000 hours – whichever comes sooner  Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	Standard Accessories	Lens Cover, AC Power Cord, VGA Cable, USB Cable, Full Function Remote,				
Lamp Warranty 6 months or 1000 hours – whichever comes sooner  Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details		Batteries x 2, Quick Start Guide,	CD User Manual, Warranty Card, WEEE Card			
Warranty Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details	RoHS	Compliant				
your local supplier for details	Lamp Warranty	6 months or 1000 hours – whichever comes sooner				
, , , , , , , , , , , , , , , , , , ,	Warranty	Warranty may vary by country. Please see www.optomaeurope.com or ask				
Colour Guarantee* 10 Years		your local supplier for details				
	Colour Guarantee*	10 Years				

#### Easy to use remote control with laser pointer



#### **Remote Control**

- Remote Mouse
- Vertical Keystone Correction
- Volume Control
- Brightness Adjustment
- Direct Input Source Selection

#### Connections

- VGA Loop-through
- VGA SCART & Component via adaptor
- DVI-I HDMI & 2nd VGA via adaptor
- 10 S-Video
- 11 Composite Video
- **12** RS232
- 13 USB (remote mouse)
- **14** RJ45
- 15 Audio In (DVI-I & VGA)
- 16 Audio In L&R (S-Video & Composite)
- 17 Audio Out
- 18 Security bar
- 19 Kensington™ Lock

# **Exceptional Connectivity/Multiple Terminals**

Digital and analogue connectivity including; DVI-I, VGA, RS232, RJ45, VGA Out and 2 x Audio In.



Projection Distance 0.5 - 3.7m (4:3 Aspect Ratio)						
Diagonal Image Size (inch)	Projection Distance (m)	Horizontal Image Size (m)	Vertical Image Size (m)	Diagonal Image Size (m)	Image Offset (m)	
55	0.67	1.12	0.84	1.40	0.13	
60	0.73	1.22	0.91	1.52	0.14	
70	0.85	1.42	1.07	1.77	0.16	
80	0.98	1.63	1.23	2.04	0.18	
90	1.10	1.83	1.38	2.29	0.21	
100	1.22	2.03	1.53	2.54	0.23	
120	1.46	2.43	1.83	3.04	0.27	
304	3.70	6.17	4.64	7.72	0.70	

For guide purposes only

EX525ST is capable of 16:9 aspect ratio projection. When projecting a 16:9 image the image sizes, screen height and offset information will differ from the above.

#### Optoma Europe Ltd.

42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ

#### www.optoma.eu

